

DETAIL OF CLEARANCE ON HORNS TO SECURGATE

SECURE SIDE

CLEAR OPENING BETWEEN SUPERPOSTS:
CLEAR OPENING OF EXISTING GATE MINUS APPROX 16 in

16 in REFERENCE

DETAIL OF CLEARANCES HORNS AND SECURGATE

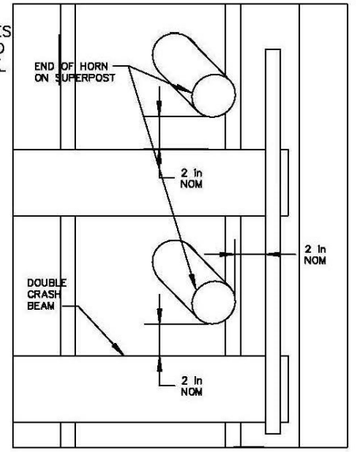

12 " SQUARE SUPERPOST
WITH I-BEAM-CONCRETE FILLED
TYP 2 PLACES

NOMINAL 4-1/2" OD CRASH BEAMS

CLEAR OPENING
OF EXISTING GATE

PLAN VIEW

21 inNOMINAL
CENTERLINE OF SUPERPOST TO
CENTERLINE OF CRASHBEAM

EXISTING GATE AND FENCE
CUT AWAY FOR CLARITY

END PLATE IS
1" X 6"

26 In

27"
NOMINAL

33 - 1/2"
NOMINAL

60"
NOMINAL

ELEVATION VIEW

FINISHED GRADE

GATE MOVEMENT
OPENS | CLOSES

PART	QTY	DESC
1	1	ATTACHABLE SECURGATE
2	1	FIXED SUPERPOST (RH)
3	1	FIXED SUPERPOST (LH)

CONCRETE ANCHOR
48 DIA X 60 DEEP
WITH REBAR CAGE
FOR SUPERPOST
TYP 2 PLACES

NO	DATE	REVISION	BY	CK	APPR
0	01FEB18	ORIGINAL ISSUE	MLK	JWA	JWA

PREPARED BY	KUNEMAN	01FEB18
CHECKED BY	ANDERSON	01FEB18
DISCIPL APPR	ANDERSON	01FEB18
INTERFACE CK		
PM APPR		
CLIENT APPR		

INNOVO SECURITY WORKS LLC

JOB NAME
ATTACHABLE SECURGATE
DOUBLE CRASH BEAM
SLIDING SINGLE LEAF
CSP-DF 2.6.1.2

SHEET TITLE
PRODUCT
ILLUSTRATION

JOB NO 1807-3	DATE 01FEB18
SCALE NONE	REV NO 0
	DWG NO SI002